


## Technical Details


- Dimensions: 121.5 x 72 x 90mm
- Ports: G1/4"
- Mounts: 1x 5mm LED

## Box Contents

- 1x Acrylic reservoir
- 1x Plastic mounting plate with o-ring
- 1x Hook/Loop adhesive pad
- 1x Case screw set
- 1x 5mm blue LED
- 4x M4 screws
- G1/4" fittings sold separately*

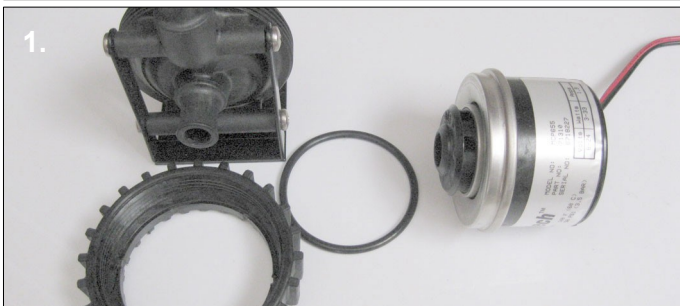

1. Disassemble the D5 pump by unscrewing the circular bracket anticlockwise. Put the bracket, o-ring and pump front to one side, they're not needed.

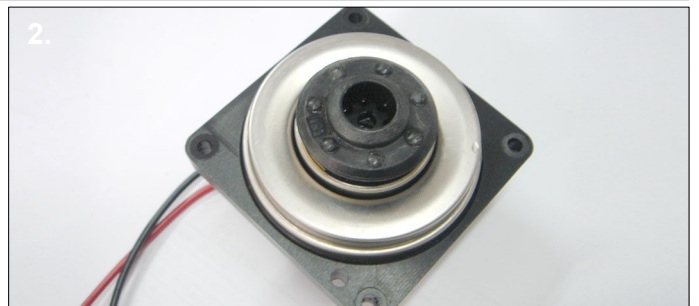

2. Push the plastic mounting plate over the back of the pump. The circular cut-out on the plastic should be facing the front. Now place the new o-ring in the circular cut-out around the pump.



3. Line up the pump and plastic mounting plate with the 4 screw holes on the back of the reservoir and attach it using four M4 screws. Make sure the o-ring is compressed.



4. Use an adjustable spanner to connect the G1/4" fittings of your choice to the inlet and outlet. The reservoir is now ready to be connected to your other components and leak tested.



5. You can attach the reservoir to your case using the hook/loop adhesive pad or the supplied screw set.



6. If you attach the reservoir to your case using the screws please attach them in the following order. Screw > washer > o-ring > reservoir > o-ring > case > washer > nut.

## Filling and removing air

The filler cap can easily be removed by using a small coin and turning anti-clockwise. The reservoir should be filled before the pump is started to avoid damage.